

# Gefen®

## **1:8 Distribution Amplifier For HDMI™ EXT-HDMI-148 USER'S MANUAL**



[www.gefen.com](http://www.gefen.com)

## ASKING FOR ASSISTANCE

---

### Technical Support:

Telephone (818) 772-9100  
(800) 545-6900

Fax (818) 772-9120

### Technical Support Hours:

8:00 AM to 5:00 PM Monday through Friday PST

### Write To:

Gefen Inc.  
C/O Customer Service  
20600 Nordhoff St.  
Chatsworth, CA 91311

support@gefen.com  
www.gefen.com

### Notice

Gefen Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

**1:8 Distribution Amplifier For HDMI** is a trademark of Gefen Inc.  
All trademarks are the property of their respective owners.

## TABLE OF CONTENTS

---

- 1 Introduction / Operation Notes**
- 2 Features**
- 3 Panel Descriptions**
- 4 Connecting and Operating the 1:8 HDMI Distribution Amplifier For HDMI**
- 5 EDID Management Feature**
- 6 EDID Management Modes**
- 7 Specifications**
- 8 Warranty**

# INTRODUCTION

---

The Gefen 1:8 HDMI Distribution Amplifier is the perfect solution for anyone who needs to send one source of digital high definition video to multiple displays at the same time. It supports all HDMI equipment, such as DVD players and satellite set top boxes and all HDMI displays. In operation, the digital video source is connected to the distribution amplifier's one input while eight HDMI outputs are available to be used in part or in full. Once the unit is connected and powered, your source can be distributed up to eight digital displays at the same time.

## How It Works

Simply connect your HDMI video source to the 1:8 HDMI Distribution Amplifier's input using the supplied HDMI cable. Then connect up to eight HDMI displays to the unit's eight HDMI outputs. Once connected and powered, your source can be seen on all eight displays at the same time. When two or more 1:8's are connected together, you can create a larger distribution system.

# OPERATION NOTES

---

## READ THESE NOTES BEFORE INSTALLING OR OPERATING THE 1:8 DISTRIBUTION AMPLIFIER FOR HDMI

- This device supports advanced EDID management. Please see pages 5 & 6 for complete details
- HDMI and HDCP Compliant
- Compatible with all HDMI and DVI\* displays

\*When used with a HDMI to DVI adapter

# FEATURES

---

## Features

- Connects up to eight HDMI/DVI displays at the same time to one video source
- Allows simultaneous display
- Supports resolutions up to 1080p, 2K, and 1920 x 1200
- Extends the range of HDMI compliant devices by equalizing and re-clocking the HDMI signal
- HDMI/HDCP compliant

## Includes:

- (1) 1:8 Distribution Amplifier For HDMI
- (1) 6 Ft HDMI cable (M-M)
- (1) 24V DC Power Supply
- (1) Set of Rack Ears
- (1) Users Manual



*Front Panel*



Power LED  
Indicator

*Back Panel*



HDMI Input

HDMI Output  
1

HDMI Output  
2

HDMI Output  
3

HDMI Output  
4

HDMI Output  
5

HDMI Output  
6

HDMI Output  
7

HDMI Output  
8

24V DC Power  
Input

## CONNECTING AND OPERATING THE 1:8 DISTRIBUTION AMPLIFIER FOR HDMI

---

### **How to Connect the 1:8 Distribution Amplifier For HDMI**

- 1** Connect the supplied cable from the HDTV HDMI source into the HDMI input port of the 1:8 Distribution Amplifier For HDMI.
- 2** Connect the user supplied cable(s) from your display(s) into the HDMI output port(s) of the 1:8 Distribution Amplifier For HDMI.
- 3** Plug the 24V DC power supply into the 1:8 Distribution Amplifier For HDMI.

## **EDID MANAGEMENT FEATURE**

---

### **EDID. What is it and what is it used for?**

Under normal circumstances, a source device (digital and analog) will require information about a connected device/display to assess what resolutions and features are available. The source can then cater its output to send only resolutions and features that are compatible with the attached device/display. This information is called EDID (Extended Display Information Data) and a source device can only accept and read one EDID from a connected device/display. Likewise, the source can only output one resolution for use by a connected device/display.

### **Why is EDID so important with the 1:8 Distribution Amplifier for HDMI?**

The 1:8 Distribution Amplifier for HDMI is a complex piece of technology that replicates a single source to multiple outputs. The single source device will require one EDID to read. EDID management is carefully handled by the 1:8 Distribution Amplifier for HDMI to provide a single EDID for the source to read.

### **What options do I have to manage the EDID in the 1:8 Distribution Amplifier for HDMI?**

First, it is important to note that each source device can only output one video/audio signal type. This includes resolutions and timings. When multiple devices/displays are used, such as with the 1:8 Distribution Amplifier for HDMI, it is important to use devices/displays that have similar or compatible resolutions/features. This will ensure that the single video/audio signal produced by the source device is accepted by all of the connected output devices/displays.

The user has the option, through a combination of DIP switch settings within the 1:8 Distribution Amplifier for HDMI, to choose how the unit will manage the EDID from multiple HDMI devices/displays. Therefore the user has some control over the resolutions/features that the source device will output. The 1:8 Distribution Amplifier for HDMI has multiple EDID management modes that will control how the EDID information from multiple devices/displays are combined, ignored, and routed.


### **How do I change EDID modes in the 1:8 Distribution Amplifier for HDMI?**

There is a bank of 8 DIP switches located on the main-board inside of the 1:8 Distribution Amplifier for HDMI. DIP switches 1, 2, 5, and 7 are used in different combinations to manage the EDID modes.

To access these DIP switches it will be required to open the unit. To do this, remove all screws on the underside and side of the unit. Remove all HEX screws on the rear panel. This includes the screws above each HDMI port. Carefully slide the unit apart and locate the DIP switch bank on the main-board.

**EDID Modes**

The diagram below illustrates the 8 DIP switch bank.

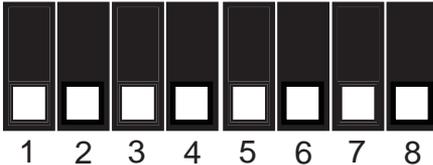

DIP SWITCH	Function
1	EDID Mode
2	EDID Mode
3	N/A
4	N/A
5	EDID Mode
6	N/A
7	EDID Mode
8	N/A

Use DIP switches 1, 2, 5, and 7 to select the desired EDID management mode.

**EDID Mode 0 (Switch 1=OFF Switch2=OFF Switch5=ON)**

- Edid is copied from the device connected to the first active hdmi output port.
- All features newer than HDMI 1.2 are cleared.

**EDID Mode 1 (Switch 1=ON Switch2=OFF Switch5=ON)**

- Same as Mode 0 and adds basic audio support.

**EDID Mode 2 (Switch 1=OFF Switch2=ON Switch5=ON)**

- Same as Mode 0 and adds full audio support.

**EDID Mode 3 (Switch 1=ON Switch2=ON Switch5=OFF)**

- EDID is generated based on the common video and audio features of all of the connected output devices.

**EDID Mode 4 (Switch 1=OFF Switch2=ON Switch5=OFF)**

- Same as Mode 3 and adds basic audio support.

**EDID Mode 5 (Switch 1=ON Switch2=OFF Switch5=OFF)**

- Same as Mode 3 and adds full audio support.

**EDID Mode 6 (Switch 1=OFF Switch2=OFF Switch5=OFF) DEFAULT**

- EDID is generated based on the common video features of all of the connected devices and the combined audio features of all of the connected output devices.

**EDID Mode 7 (Switch 1=ON Switch2=ON Switch5=ON)**

- EDID is passed unmodified from the device connected to the first active output port.

## SPECIFICATIONS

---

Video Amplifier Bandwidth .....	165 MHz
Input Video Signal .....	1.2 Volts p-p
Input DDC Signal .....	5 Volts p-p (TTL)
Single Link Range .....	...1080p / 1920 x 1200
Input Connector Type .....	HDMI Type A 19 Pin
Output Connector Type .....	HDMI Type A 19 Pin
Power Consumption .....	60 Watts (max.)
Power Supply .....	24V DC
Dimensions .....	17"W x 1.75"H x 5.5"D
Shipping Weight .....	6 Lbs

## WARRANTY

---

Gefen warrants the equipment it manufactures to be free from defects in material and workmanship.

If equipment fails because of such defects and Gefen is notified within two (2) years from the date of shipment, Gefen will, at its option, repair or replace the equipment, provided that the equipment has not been subjected to mechanical, electrical, or other abuse or modifications. Equipment that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for ninety (90) days from the day of reshipment to the Buyer.

This warranty is in lieu of all other warranties expressed or implied, including without limitation, any implied warranty or merchantability or fitness for any particular purpose, all of which are expressly disclaimed.

1. Proof of sale may be required in order to claim warranty.
2. Customers outside the US are responsible for shipping charges to and from Gefen.
3. Copper cables are limited to a 30 day warranty and cables must be in their original condition.

The information in this manual has been carefully checked and is believed to be accurate. However, Gefen assumes no responsibility for any inaccuracies that may be contained in this manual. In no event will Gefen be liable for direct, indirect, special, incidental, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. The technical information contained herein regarding the features and specifications is subject to change without notice.


For the latest warranty coverage information, please visit Gefen's Warranty web page at <http://www.gefen.com/kvm/aboutus/warranty.jsp>

## PRODUCT REGISTRATION

**Please register your product online by visiting Gefen's web site at <http://www.gefen.com/kvm/Registry/Registration.jsp>**



Rev X1

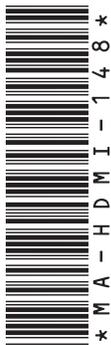

**20600 Nordhoff St., Chatsworth CA 91311**  
**1-800-545-6900 818-772-9100 fax: 818-772-9120**  
**www.gefentv.com support@gefentv.com**

