

# LARGE VENUE PROJECTOR EH501



## UNSURPASSED HD PERFORMANCE



Outstanding brightness and color accuracy for impactful presentations



Vertical lens shift for installation flexibility



Full 3D compatibility for captivating presentations



Future proof your installation with comprehensive connectivity

PRO|SCENE

TRUE HD  
1080p

3  
YEAR  
WARRANTY  
OPTOMA EXPRESS

Full 3D  
1080p

PICTURE BY  
DLP  
TEXAS INSTRUMENTS

HDMI  
HIGH DEFINITION MULTIMEDIA INTERFACE

BrilliantColor  
4DLE

RoHS  
COMPLIANT

WIDESCREEN  
16:9  
ENHANCED



The Optoma EH501 was designed to deliver unsurpassed performance and reliability to meet your installation needs. Its powerful 5000 lumens output and impressive 15,000:1 contrast ratio deliver remarkably bright presentations with sharp text and color-rich graphics.

To ensure it will perform to your current and future needs, the EH501 features a comprehensive I/O panel and the most advanced feature sets in its class. Outstanding features on this remarkable product include HDMI and DVI for digital connectivity, over-the-network presentation capability, wireless presentation capability via optional USB dongle, vertical lens shift and discrete audio inputs including microphone input for maximum installation convenience.

## CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART  
PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS

SET TOP BOXES



CAMCORDERS



GAME  
CONSOLES



DIGITAL  
CAMERAS



Roku®



Apple TV®

## LARGE VENUE PROJECTOR — EH501

### OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	HD (1920 x 1080)
Maximum Resolution	1080p (1920 x 1080)
Brightness	5000 lumens
Contrast Ratio	15,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	4000/3000/2500 Hours (ECO+/ECO/normal) 280W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	Auto Keystone, ±40° Vertical
Uniformity	>85%
Aspect Ratio	16:9 Native and 4:3 compatible
Throw Ratio (Distance/Width)	1.37–2.05
Projection Distance	3.2'–32.8' (1.0–10 m)
Image Size (Diagonal)	23.4'–300" (0.6–7.62 m)
Projection Lens	F=2.42–2.98, f=20.77–31.13 mm, 1.5x manual zoom and focus
Lens Shift	Vertical 115% ~ 134%
Audio	Two 15-Watt speakers
Noise Level (STD/Bright)	27dB
Remote Control	IR remote mouse with laser
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 355W (Normal), Min 279W (Eco+), <0.5W (standby-ECO)

### COMPATIBILITY SPECIFICATIONS


Computer Compatibility	HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Top and bottom, side by side, frame packing, HQFS (See user manual for details). 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.3–91.1KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
I/O Connection Ports	HDMI v1.4, DVI-D, two VGA-in, VGA-out, S-video, composite video, two stereo audio-in, stereo RCA audio in, mic-in, stereo audio-out, RJ45, RS-232C, Two USB-A, Two USB-B, 12V trigger
Loop Through (Audio, VGA)	Monitor: D-Sub 15 pin VGA output Audio-out: Stereo 3.5 mm mini-jack (functional in both normal and standby modes)

### PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	9.9 lb (4.5 kg)
Dimensions (W x H x D)	15.2" x 6" x 11" (386 x 152 x 279 mm)

\*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of the RF 3D emitter. Please visit [www.OptomaUSA.com](http://www.OptomaUSA.com) for more information

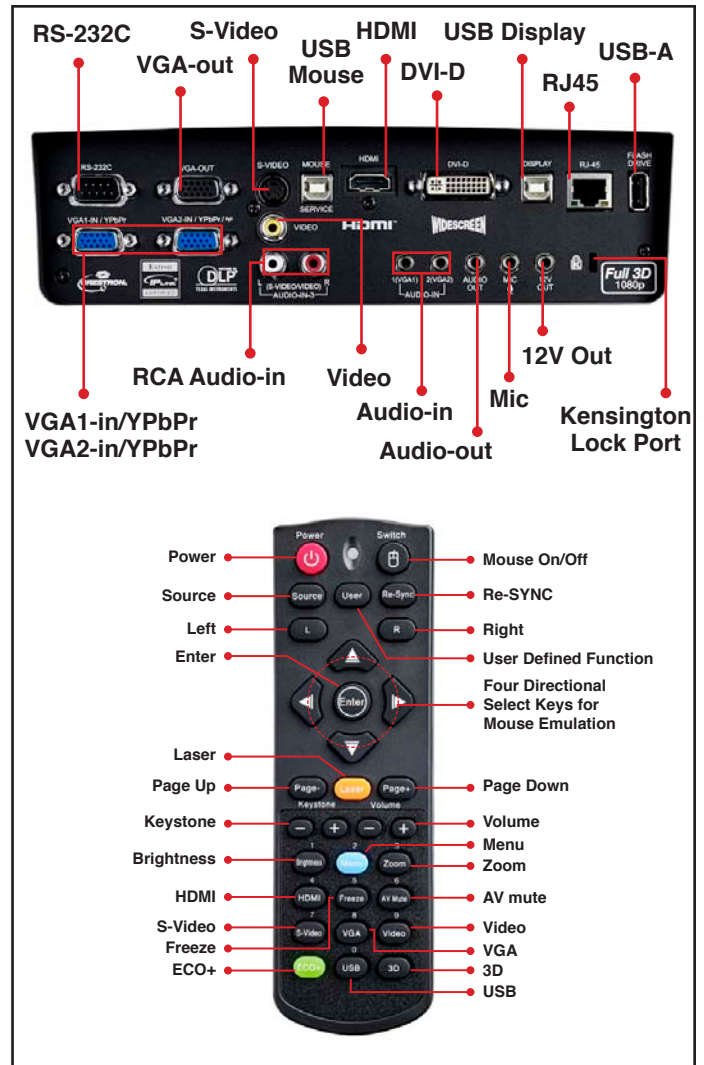

#### Warranty

3-Year Optoma Express Service, 1-Year on Lamp

#### What Comes in the Box

EH501 projector, AC power cord, VGA to VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card and warranty card

#### Optional Accessories

HDMI cable, ceiling mount, VGA to component cable, RS-232 cable and Optoma screens, filter

#### Accessory Part Numbers

Lamp: BL-FU310A Mount: BM-5001U  
Remote: BR-5046L USB adapter: BI-EXTBGN  
DLP® Link™ 3D glasses: BG-ZD301 Filter: PM434-4550-00

UPC 796435 41 803 8

[www.OptomaUSA.com](http://www.OptomaUSA.com)

**Optoma**  
Projector Expert

Copyright © 2013 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.